



PMC LONE STAR



Gages, Calibration & Instruments


8 Round Casing Ring Gage Adjusted Standoff for Ovality of Pipe

PMC Lone Star Technical Brief Doc. 106 Rev. A

David R. Maisch
Director of Engineering & Industrial Affairs
PMC Lone Star
August 3, 2018



API Specification 5B 16th edition has added new requirements for inspecting ovality of 8 Round Casing pipe using crest diameter gages such as the CDRP. The addition of crest diameter inspection to the specification changes the allowable standoff of ring gages used to inspect pipe for functional size. The presence of ovality in a pipe will cause the ring gage to standoff further. The revised specification acknowledges this effect on standoff and provides guidance on allowable standoff variation based on the amount of ovality present. The ovality standoff allowance is added to the maximum standoff as prescribed within the specification, the minimum standoff remains unchanged.

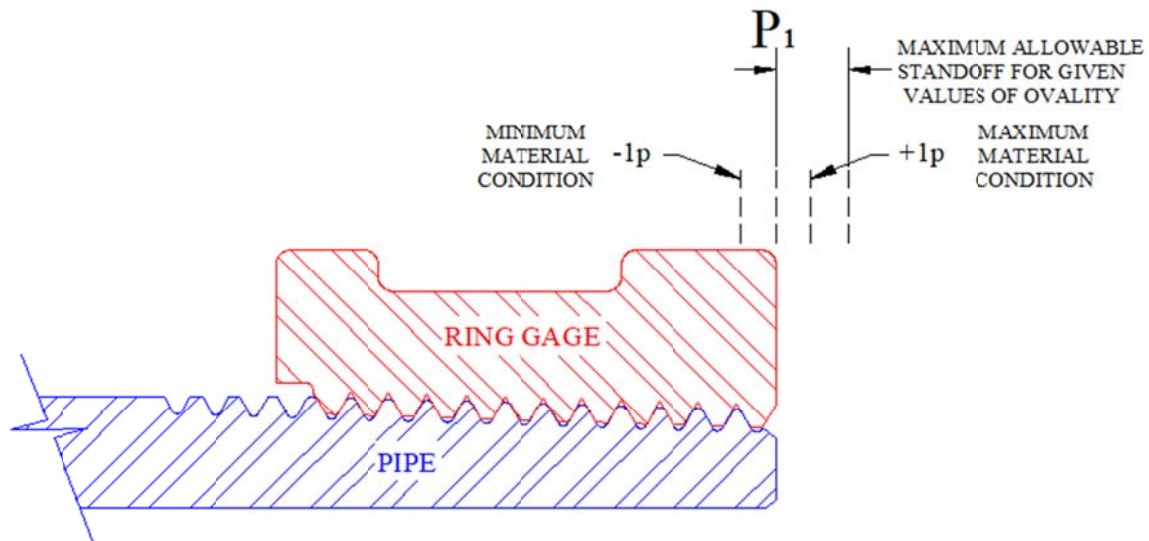



8 Round Casing

The basic standoff of a Ring Gage to an 8 Round Casing Pipe is $P_1 \pm 1p$

$P_1 = 0.000$ (nominal), actual P_1 from Ring Gage certification should be used

$p = 0.125$ for all 8 Round Casing

Min Standoff = $P_1 - 1p = -0.125$

Max Standoff = $P_1 + 1p + \text{Ovality Standoff Allowance}$

Max Standoff = $0.125 + \text{Ovality Standoff Allowance}$

8 Round Casing Pin Standoff			
Thread Ovality	Ovality Standoff Allowance	Min Ring Gage Standoff	Max Ring Gage Standoff
(in.)	(in.)	$P_1 - 1p$	$P_1 + 1p + \text{Ovality Standoff Allowance}$
(in.)	(in.)	(in.)	(in.)
0.001	0.008	-0.125	0.133
0.002	0.016	-0.125	0.141
0.003	0.024	-0.125	0.149
0.004	0.032	-0.125	0.157
0.005	0.040	-0.125	0.165
0.006	0.048	-0.125	0.173
0.007	0.056	-0.125	0.181
0.008	0.064	-0.125	0.189
0.009	0.072	-0.125	0.197
0.010	0.080	-0.125	0.205
0.011	0.088	-0.125	0.213
0.012	0.096	-0.125	0.221
0.013	0.104	-0.125	0.229
0.014	0.112	-0.125	0.237
0.015	0.120	-0.125	0.245
0.016	0.128	-0.125	0.253
0.017	0.136	-0.125	0.261
0.018	0.144	-0.125	0.269
0.019	0.152	-0.125	0.277
0.020	0.160	-0.125	0.285
0.021	0.168	-0.125	0.293
0.022	0.176	-0.125	0.301
0.023	0.184	-0.125	0.309
0.024	0.192	-0.125	0.317
0.025	0.200	-0.125	0.325
0.026	0.208	-0.125	0.333
0.027	0.216	-0.125	0.341
0.028	0.224	-0.125	0.349
0.029	0.232	-0.125	0.357
0.030	0.240	-0.125	0.365
0.031	0.248	-0.125	0.373
0.032	0.256	-0.125	0.381
0.033	0.264	-0.125	0.389

Table continued on next page



8 Round Casing Pin Standoff (Continued)			
Thread Ovality	Ovality Standoff Allowance	Min Ring Gage Standoff	Max Ring Gage Standoff
(in.)	(in.)	P ₁ - 1p	P ₁ + 1p + Ovality Standoff Allowance
(in.)	(in.)	(in.)	(in.)
0.034	0.272	-0.125	0.397
0.035	0.280	-0.125	0.405
0.036	0.288	-0.125	0.413
0.037	0.296	-0.125	0.421
0.038	0.304	-0.125	0.429
0.039	0.312	-0.125	0.437
0.040	0.320	-0.125	0.445
0.041	0.328	-0.125	0.453
0.042	0.336	-0.125	0.461
0.043	0.344	-0.125	0.469
0.044	0.352	-0.125	0.477
0.045	0.360	-0.125	0.485
0.046	0.368	-0.125	0.493
0.047	0.376	-0.125	0.501
0.048	0.384	-0.125	0.509
0.049	0.392	-0.125	0.517
0.050	0.400	-0.125	0.525
0.051	0.408	-0.125	0.533
0.052	0.416	-0.125	0.541
0.053	0.424	-0.125	0.549
0.054	0.432	-0.125	0.557
0.055	0.440	-0.125	0.565
0.056	0.448	-0.125	0.573
0.057	0.456	-0.125	0.581
0.058	0.464	-0.125	0.589
0.059	0.472	-0.125	0.597
0.060	0.480	-0.125	0.605
0.061	0.488	-0.125	0.613
0.062	0.496	-0.125	0.621
0.063	0.504	-0.125	0.629
0.064	0.512	-0.125	0.637
0.065	0.520	-0.125	0.645
0.066	0.528	-0.125	0.653
0.067	0.536	-0.125	0.661
0.068	0.544	-0.125	0.669
0.069	0.552	-0.125	0.677
0.070	0.560	-0.125	0.685
0.071	0.568	-0.125	0.693
0.072	0.576	-0.125	0.701
0.073	0.584	-0.125	0.709
0.074	0.592	-0.125	0.717
0.075	0.600	-0.125	0.725
0.076	0.608	-0.125	0.733
0.077	0.616	-0.125	0.741
0.078	0.624	-0.125	0.749
0.079	0.632	-0.125	0.757
0.080	0.640	-0.125	0.765